


LM/PAKS, BM/PAKS

Polyurethan Rollen

Gehäuse: Besonders stabile gepresste Stahlblechgehäuse galvanisch verzinkt. Drehkranz mit zweifachem, gehärtetem Kugelkranz, dadurch **besonders unempfindlich gegen Stöße und Schläge**, Radachse verschraubt. Mit Anschraubplatte.

Rad: Felge aus Aluminium, mit Rillenkugellagern.

Reifen aus Polyurethan **Soft**, blau, spurlos, unlöslich mit der Felge verbunden.

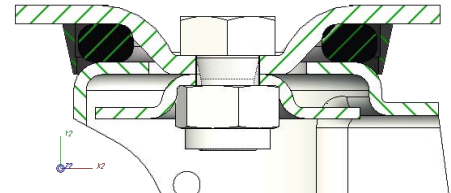

Polyurethane Castors

Housing: Extra solid housing made of galvanized steel, pressed. Pivot bearing with double ball ring and hardened bearing shell, therefore **especially resistant to impact and blows**, screwed axle. With mounting plate.

Wheel: Rim made from Aluminium, with deep groove ball bearings.

Tyre made from Polyurethane Soft, blue, traceless abrasion, non removable fixed with rim.

-20° C - +80 °C, Härte / Hardness: 78° +/- 3° Shore A

											Lagerart bearing
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
LM/PAKS100	LM/PAKS100/F	BM/PAKS100	100	40	135	39	105x85	80x60	9	180	Kugellager ball bearing
LM/PAKS125	LM/PAKS125/F	BM/PAKS125	125	40	166	46	135x110	105x75-80	13	250	Kugellager ball bearing
LM/PAKS150	LM/PAKS150/F	BM/PAKS150	150	40	210	57	135x110	105x75-80	13	300	Kugellager ball bearing
LM/PAKS160	LM/PAKS160/F	BM/PAKS160	160	50	215	57	135x110	105x75-80	13	450	Kugellager ball bearing
LM/PAKS200	LM/PAKS200/F	BM/PAKS200	200	50	245	65	135x110	105x75-80	13	700	Kugellager ball bearing

Varianten/Zubehör Option/Accessory	
Beschreibung/description auf Seite/on page	Fußschutz/foot guard www.schwalb-rollen.de/aktuelles.html
Lieferbar für available for	Ø 100 - 200 mm